


CLS-EMX7SR

LED Emergency Exit Light




FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-resistant
- Input Voltage: 120/277V
- Power consumption: 3.5W max.
- Output: 3W max.
- 3.6V Nickel Cadmium Battery
- Charging time: 24 hours
- Discharge time: 90 minutes
- Operating temperature: 0°C~40°C
- Dimension: 299*184.5*44.6mm

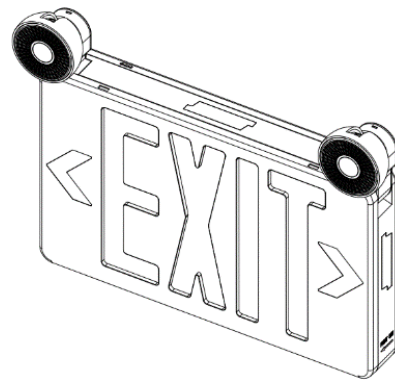

PHOTOMETRIC

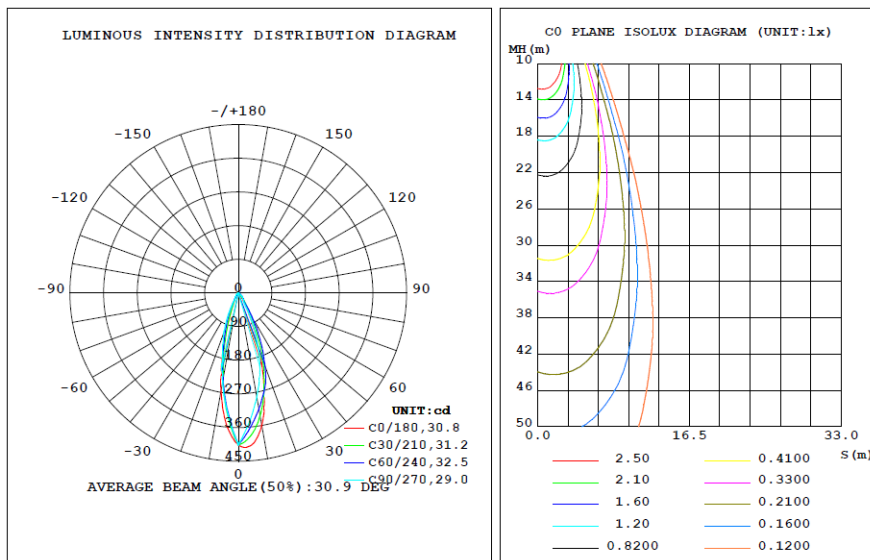

ORDER INFORMATION

Model	Voltage	Color	Emergency Duration	Certificate
CLS-EMXSR	120/277V	Red	90 minutes	UL
CLS-EMX7SG	120/277V	Green	90 minutes	UL